


intelliFAX[®]-2800

LASER PLAIN PAPER FAX
PHONE & COPIER

FEATURING

- Fast 10 ppm Laser Engine Used for Printing Copies and Faxes
- 14.4K bps Fax Modem
- 2MB, Dual Access Memory
- 20 Page Automatic Document Feeder
- 200 Sheet Paper Cassette

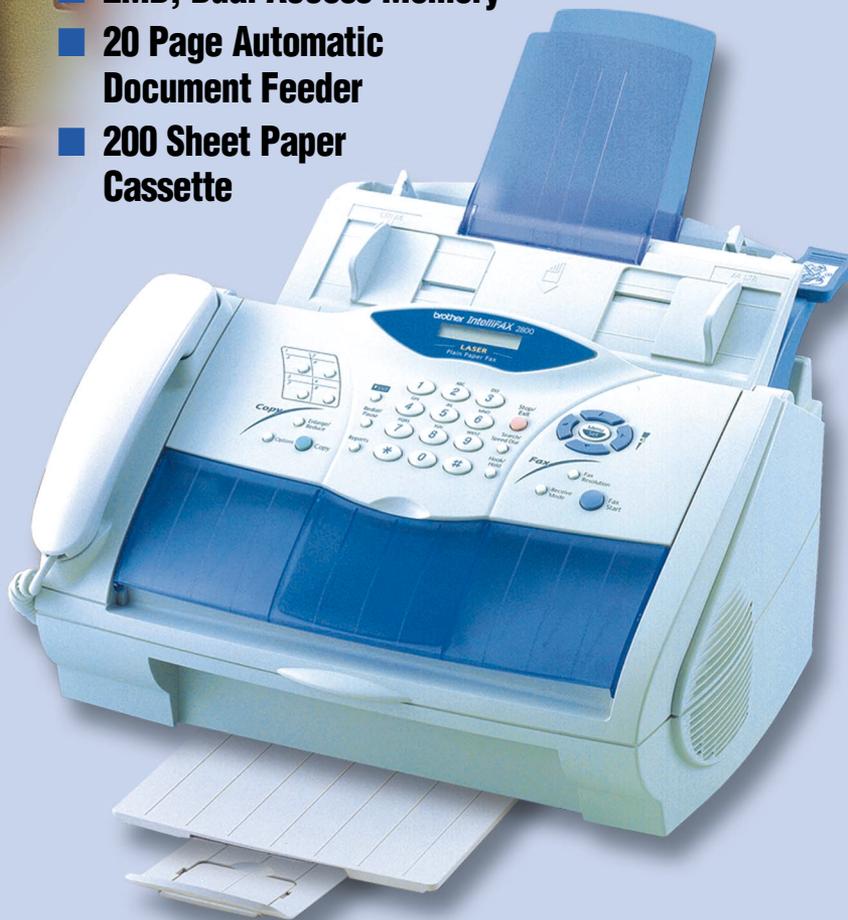

2MB
MEMORY with
BROADCASTING

DUAL
ACCESS
Scan a fax into memory while
another is being sent or received.

At your side.™

brother[®]


intelliFAX®-2800

LASER PLAIN PAPER FAX PHONE & COPIER



Featuring...

- Fast 10 ppm Laser Engine Used for Printing Copies and Faxes
- 14.4K bps Fax Modem
- 2MB, Dual Access Memory
- 20 Page Automatic Document Feeder
- 200 Sheet Paper Cassette
- Stores up to 90 Pages* for Out-Of-Paper Reception and Quick Scan
- 108 Station Auto Dialing
- Fax Broadcasting to up to 158 Locations
- Fax Forwarding, Paging and Remote Retrieval
- Economical replacement toner cartridges deliver lower costs per page
- Automatically receives fax and voice calls on the same phone line
- Call Waiting/Caller ID and Distinctive Ring Detection ready**
- Special offer included from CallManage™ for "One-Touch" Internet Calling and Faxing†
- Multi-copying (up to 99 copies)
- Copy Enlargement to 200%, Reduction to 50% in 1% increments
- Navigation keys for menus, options and index dialing
- Search stored Auto Dial numbers alphabetically



PRODUCT SPECIFICATIONS

Approved:	UL and FCC
Unit Dimensions:	15.6" x 14.1" x 9.6"
Unit Weight:	16.5 lbs.
Carton Dimensions:	17.9" x 20.4" x 14.8"
Carton Weight:	24.2 lbs.
UPC Code:	0 12502 56577 2
Compatibility:	Group 3 ITU-TS
Coding Method:	MH/MR/MMR
Modulation:	14400/12000/9600/7200/4800/2400 bps
Transmission Time:	6 seconds per page*
Document Input Width:	5.8" to 8.5"
Recording Paper Size:	8.5" x 11", 8.5" x 14"
Effective Scanning Width:	8.2"
Fax Resolution:	Standard: 203 x 98 lines/inch
	Fine Mode: 203 x 196 lines/inch
	Superfine: 203 x 392 lines/inch
Gray Scale:	64 shades
Display:	16 character LCD
Communication Source:	Public Switched Telephone Network
Speaker Type:	Monitor
Communication Requirements:	USOC RJ11C Modular Jack (or equivalent)
Dialing System:	Tone
Power Supply:	120V, 50/60Hz
Power Consumption:	Sleep Mode: 10W or less
	Standby: 70W or less
	Avg. Operating: 260W or less
Noise Level:	Operating: 50 dbA or less
	Standby: 39 dbA or less
Operating Environment:	50° to 90.5° (F)



Other Standard Features

- Built-in Telephone Handset
- Electronic Cover Page
- Multiple Resolution Transmission
- "Smoothing" Enhanced Image Resolution
- Answering Machine Interface
- Polling and Delayed Transmission
- Error Correction Mode (ECM)
- 64 Shade Gray Scale



OPTIONAL ACCESSORIES†

TN250:	Replacement Toner Cartridge (2,200 pages per cartridge*)
DR250:	Replacement Drum Unit

use only
GENUINE
brother
supplies

† Requires additional purchase
▲ Based on 5% page coverage

* Using Brother #1 chart with MMR coding and standard resolution.

** Contact local phone company for availability of these services.

† Requires change of carrier to CallManage, Inc. This feature may not be available in some parts of the USA and is not available in Canada. Brother International Corp. is not responsible for long distance services or customer billing. See complete terms and conditions inside Owner's Manual.

© 2001 BROTHER INTERNATIONAL CORPORATION, 100 Somerset Corporate Blvd., Bridgewater, NJ 08807-0911
For more information please call the Brother Fax-Back System at 1-800-521-2846 (USA),
1-800-681-9838 (CANADA) or visit our web site at www.brother.com.
All specifications are subject to change without notice. Printed in USA. CATFX2800

At your side.™
brother®

www.brother.com