

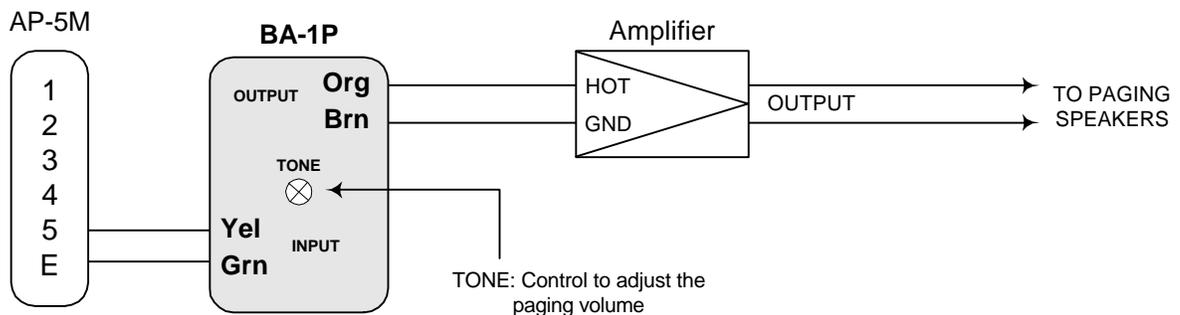
**BA-1P**

Paging Adaptor

Use with:

**AP-M or MP-S Series Systems****- INSTRUCTIONS -**

The BA-1P Paging Adaptor allows paging to external speakers from the AP-M or MP-S series master stations. For each zone of paging, use a BA-1P with the appropriate sized amplifier. The BA-1P provides outgoing paging only. Talkback is not available.

**WIRING DIAGRAM:****NOTES:**

1. The above example shows station 5 accessing the paging zone. Any unused station can be used for a paging zone.
2. The colored wires at each end of the BA-1P are the Input and Output. Connect them to the intercom and amplifier as shown.
3. Only wiring concerning the BA-1P is shown here. For complete installation information see the system's instruction manual.
4. The TONE control is located on the top of the BA-1P, and requires a screwdriver for adjustment.

**SPECIFICATIONS:**

Power Source: Supplied by master  
 Input: 8 ohms  
 Output: 10K ohms  
 Amplifier input requirements: Aux input (10K ohms)  
 Dimensions: 4-1/8"H x 2-1/2"W x 1-1/2"D

**BA-1P COLOR CODE DEFINITIONS:**

Org: Hot side of output  
 (Connect to amplifier input)  
 Brn: Ground side of output  
 (Connect to amplifier input)  
 Yel: Hot side of BA-1 input  
 (Connect to station # on master)  
 Grn: Ground side of input  
 (Connect to "E" terminal on master)

**TOLL FREE TECHNICAL SUPPORT:**

(800) 692-0200  
 TOLL FREE FAX LINE:  
 (800) 832-3765  
 E-MAIL: tech-serv@aiphone.com