


# Additional Information

## ◆ Call Waiting Caller ID (Visual Caller ID)

When using the call waiting tone supplied by the telephone company over analog lines, the caller's telephone number will flash on the display twice for five seconds each at 15-second intervals. (The caller's name will not be displayed.) Note that the received telephone number will not be displayed on telephones or wireless phones connected to SLT ports. In addition, the telephone number will not be logged in the Incoming Call Log or by Station Message Detail Recording (SMDR). It is possible to speak alternately with two parties by performing External Feature Access (EFA). However, if EFA is performed more than twice (for example, switching to the second call, back to the first call, then back to the second call again), the callers' information will stop being displayed.

## To Answer Call Waiting from the Telephone Company

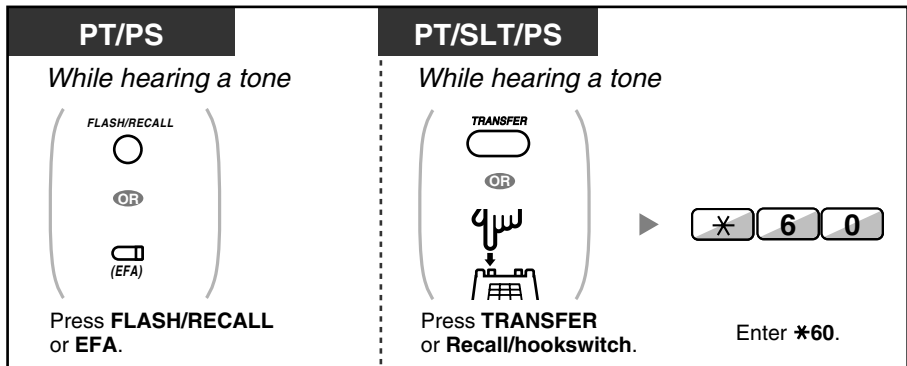

- **To return to the original party**, repeat the operation.
- In this case, FLASH/RECALL button on proprietary telephones is in the External Feature Access (EFA) mode.

### Feature Guide Reference

- 1.1.3.3 Call Waiting
- 1.16.2 Incoming Call Log

### User Manual Reference

- 1.4.4 Call Waiting
- 1.11.1 Call Log

## ◆ Incoming Call Log

The following information is logged in the Incoming Call Log.

Telephone Information	KX-TD7690/ KX-TD7680	KX-T7735	1-line display PT
			Wireless phone (KX-T7885/KX-TD7895)
Caller's Name	✓	✓	✓
Caller's Phone Number	✓	✓	—*
Date/Time call received	✓	✓	—
Answered or Not Answered Confirmed or Not Confirmed	✓	—	—

\*: If the caller's name is not logged, the caller's phone number is displayed.  
If the caller's name is logged, the caller's phone number is not displayed.

### Feature Guide Reference

1.16.2 Incoming Call Log

### User Manual Reference

1.11.1 Call Log