

# Lexmark C522n



- Quick color output of up to 20 ppm
- Advanced chemically processed toner and automatic calibration for consistently stunning results
- Compact design for users with limited space
- Control the cost of color with Lexmark's Color Care Technology

## Lexmark C522n




### Product Specifications

<b>Part Number</b>	US/Canada: 22H0050
<b>Product Class</b>	Small workgroup color laser printer; calibrated for PANTONE™ solid color simulation
<b>Speed</b>	Up to 20 ppm color/20 ppm black
<b>Resolution</b>	1200 x 1200 dpi, 4800 color quality printing
<b>Time to First Page</b>	As fast as 13 seconds
<b>Processor</b>	312 MHz
<b>Memory (std./max.)</b>	128MB/640MB
<b>Connectivity</b>	Standard: USB, Ethernet Optional: Wireless, Gigabit Ethernet <b>See pages 95-103 for ordering information.</b>
<b>Operating Systems</b>	Windows, Linux, UNIX, Mac, NetWare, and O/S 400 <b>For a complete list, visit <a href="http://www.lexmark.com">www.lexmark.com</a>.</b>
<b>Printer Languages</b>	PostScript 3 and PCL 6 emulations, PPDS Migration Tool
<b>Direct Print Formats</b>	PDF 1.5
<b>Fonts</b>	PCL: 89 scalable, 2 bitmapped (Includes OCR-A, OCR-B and Code 3 of 9 bar codes); PostScript: 91; PPDS: 39 scalable and 5 bitmapped <b>See page 89 for additional font options.</b>
<b>Size (WxDxH)</b>	17.3 in. x 16.1 in. x 19 in. (440 mm x 408 mm x 484 mm)
<b>Weight</b>	57 lb. (25.9 kg)
<b>Acoustics</b>	51 dBA printing, 32 dBA idle
<b>Duty Cycle</b>	Up to 45,000 pages per month
<b>Base Warranty</b>	1-year Onsite Repair; <b>See pages 119-127 for additional information.</b>

### Media Specifications

<b>Paper Capacity (sheets)</b>	Standard Input: 250 or 1 single-sheet slot Maximum Input: 750 (250 + 500) Output: 250
<b>Paper Sources</b>	Standard Input <sup>2</sup> : 2 Maximum Input <sup>2</sup> : 3 Output: 1
<b>Media Types</b>	Plain paper, recycled paper, glossy paper, paper labels, card stock, transparencies, envelopes <b>See page 117 for media information.</b>
<b>Media Sizes</b>	Letter, legal, A4, A5, JIS B5, executive, statement, folio, universal (3.875 in. x 4.875 in. to 8.5 in. x 14 in.), envelopes (7 3/4, 9, com 10, DL, C5, B5, other)
<b>Media Weights</b>	Plain paper: 16 to 47 lb. (60 to 176 g/m <sup>2</sup> ); Recycled paper: 20 to 47 lb. (75 g/m <sup>2</sup> to 176 g/m <sup>2</sup> ); Card stock: up to 90 lb Index (163 g/m <sup>2</sup> )

### In the Box



#### Lexmark C522n

- C522n printer
- 1,500-page Cyan, Magenta, Yellow, and Black Return Program Starter Toner Cartridges<sup>1</sup>
- Photodeveloper Cartridges
- Power Cord
- Publications CD
- Drivers and Utilities CD
- Setup Sheet
- User's Guide
- Supplies Program Flyer


**COLOR  
CARE**  
Technology

See page 28 for more information

## Supplies & Accessories

<b>Supplies</b>	3,000-page Cyan Return Program Toner Cartridge <sup>1</sup>	C5220CS
	3,000-page Magenta Return Program Toner Cartridge <sup>1</sup>	C5220MS
	3,000-page Yellow Return Program Toner Cartridge <sup>1</sup>	C5220YS
	4,000-page Black Return Program Toner Cartridge <sup>1</sup>	C5220KS
	3,000-page Cyan Toner Cartridge <sup>1</sup>	C5222CS
	3,000-page Magenta Toner Cartridge <sup>1</sup>	C5222MS
	3,000-page Yellow Toner Cartridge <sup>1</sup>	C5222YS
	4,000-page Black Toner Cartridge <sup>1</sup>	C5222KS
	Photoconductor Unit (up to 20,000 pages)	C52030X
	Photoconductor Unit Multi-Pack	C52034X
	Waste Toner Bottle (up to 30,000 pages)	C52025X
<b>Memory/Flash Options</b>	Transfer Belt Maintenance Kit (up to 120,000 pages)	40X1401
	Fuser Maintenance Kit (up to 120,000 pages)	40X1400
	128MB SDRAM	13N1523
	256MB SDRAM	13N1524
<b>Solutions</b>	512MB SDRAM	13N1526
	32MB Flash Card	1021208
	64MB Flash Card	1021209
<b>See pages 77-93 for additional information.</b>		

## Paper-Handling Configurations<sup>2</sup>

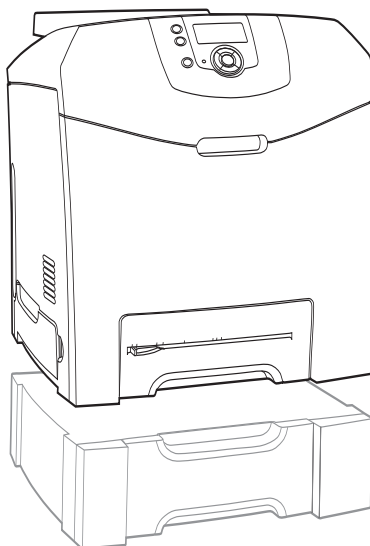

- Single-sheet Slot (standard)
- 250-sheet Drawer (standard)
- 500-sheet Drawer (18B2100)

## Additional Information

<sup>1</sup> Yield is based on approximately 5% coverage per color with printer set at factory defaults.

<sup>2</sup> Displays all available options for **base** model.