

# Lexmark E340 & E342n



- High speed laser printing at up to 30 ppm
- PCL 6 and PostScript 3 emulations across a broad range of platforms and applications
- Supports up to 800 sheets of input
- Easy-to-use operator panel simplifies setup and operation

**LEXMARK**<sup>TM</sup>

# Lexmark E340 & E342n



- 1200 x 1200 dpi resolution delivers high-quality output for text and graphics
- Advanced auto-compensator technology for reliable paper handling
- Built tough with a rugged 15,000-page-per-month maximum duty cycle

## Lexmark E340, E342n


### Product Specifications

|                           |   |
|---------------------------|---|
| <b>Part Number</b>        | US/Canada: 28S0500 (E340), 28S0600 (E342n)  |
| <b>Product Class</b>      | Desktop laser printer   |
| <b>Speed</b>              | Up to 30 ppm  |
| <b>Resolution</b>         | 1200 x 1200 dpi, 2400 image quality, 1200 image quality, 600 x 600 dpi  |
| <b>Time to First Page</b> | As fast as 7.5 seconds  |
| <b>Processor</b>          | 366 MHz   |
| <b>Memory (std./max.)</b> | 32MB/160MB  |
| <b>Connectivity</b>       |   |
| Standard                  | <b>E340:</b> Parallel, US<br><b>E342n:</b> Parallel, USB, Ethernet  |
| Optional                  | <b>E340:</b> Ethernet, Token-Ring, Serial, Wireless<br><b>E342n:</b> Token-Ring, Serial, Wireless   |
| Network Mgmt. Utility     | MarkVision Professional   |
| <b>Operating Systems</b>  | Windows, Mac, Novell, UNIX, Linux<br><b>For a complete list, visit <a href="http://www.lexmark.com">www.lexmark.com</a>.</b>                  |
| <b>Printer Languages</b>  | PostScript 3 and PCL 6 emulations; PPDS Migration Tool  |
| <b>Fonts</b>              | PCL: 89 scalable and 2 bitmapped. Includes OCR-A, OCR-B and Code 3 of 9 bar codes. PostScript: 89 scalable. PPDS: 39 scalable and 5 bitmapped |
| <b>Size (WxDxH)</b>       | 15.6 in. x 13.9 in. x 9.8 in. (396 mm x 353 mm x 249 mm)  |
| <b>Weight</b>             | 22 lb. (10 kg)  |
| <b>Acoustics</b>          | 52 dBA printing; 27 dBA idle  |
| <b>Duty Cycle</b>         | 15,000 pages per month  |
| <b>Warranty</b>           | 1-year Advanced Exchange  |

### Media Specifications

|                       |   |
|-----------------------|---|
| <b>Paper Capacity</b> |   |
| Standard Input        | 251 (250+1)   |
| Maximum Input         | 801 (250+550+1)   |
| Standard Output       | 150 top or 1 rear   |
| Maximum Output        | 150 top or 1 rear   |
| <b>Paper Sources</b>  |   |
| Standard Input        | 2   |
| Maximum Input         | 3   |
| Standard Output       | 150 top or 1 rear   |
| Maximum Output        | 150 top or 1 rear   |
| <b>Media Types</b>    | Paper, paper labels, transparencies, envelopes, card stock  |
| <b>Media Sizes</b>    | Letter, A4, A5, JIS B5, Legal, Executive, Folio, Statement, Universal (3.0 in. x 5.0 in. to 8.5 in. x 14 in.), envelopes (7 <sup>3/4</sup> , 9, 10, C5, B5, DL) |
| <b>Media Weights</b>  | Plain paper: 60-163 g/m <sup>2</sup> ; card stock: up to 90 lb. Index   |

### In the Box



#### Lexmark E340

- Lexmark E340 printer
- 1,500-page Starter Return Program Toner Cartridge<sup>1</sup>
- Photoconductor Kit (up to 30,000 pages)
- Power Cord
- Dust Cover
- Publications CD
- Drivers & Utilities CD
- Setup Sheet
- Supplies Return Program Flyer

#### Lexmark E342n

- Lexmark E340  
**EXCEPT**
- 2,500-page instead of 1,500-page Starter Return Program Toner Cartridge<sup>1</sup>
- PLUS**
- Ethernet


# Lexmark E340 & E342n

## Supplies & Accessories

Part Number

| Supplies  |  | Part Number          |
|---|--|----------------------|
| 2,500-page Return Program Print Cartridge <sup>1</sup>            |  | 24015SA <sup>2</sup> |
| 2,500-page Print Cartridge <sup>1</sup>                           |  | 24035SA <sup>2</sup> |
| 6,000-page Return Program High-yield Toner Cartridge <sup>1</sup> |  | 34015HA <sup>2</sup> |
| 6,000-page High-yield Toner Cartridge <sup>1</sup>                |  | 34035HA <sup>2</sup> |
| Photoconductor Kit (up to 30,000 pages)                           |  | 12A8302              |
| Memory Options  |  | Part Number          |
| 32MB SDRAM  |  | 16H0057              |
| 64MB SDRAM  |  | 16H0058              |
| 128MB SDRAM   |  | 16H0059              |
| 32MB Flash Memory   |  | 1021208              |

## Paper Handling Options<sup>5</sup>

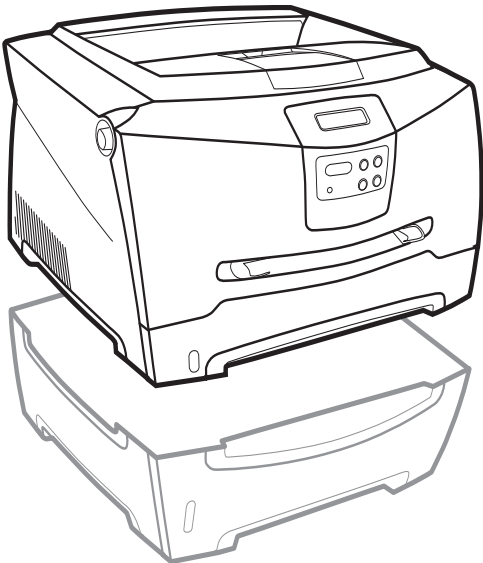

- Single-sheet Multipurpose Feeder (standard)
- 250-sheet Drawer (standard)
- 550-sheet Drawer (28S0802)

## Additional Information

<sup>1</sup> Declared yield value in accordance with ISO/IEC 19752

<sup>2</sup> Designed for use only in the United States and Canada

<sup>3</sup> Displays all available options for **base** model

# Lexmark E340 & E342n

## Additional Accessories

|  |  |         |
|--|--|---------|
| <b>Connectivity</b>                      | MarkNet X2000 Series External Print Servers <sup>1</sup> |         |
|  | X2011e Ethernet 10/100BaseTX                             | 46D0060 |
|  | X2012e Ethernet 10/100BaseTX/10Base2                     | 46D0040 |
|  | X2031e Ethernet 10/100BaseTX (3 ports)                   | 46D0020 |
|  | X2030t Token-Ring (3 ports)                              | 46D0000 |
|  | MarkNet N4000 Series External Print Servers <sup>2</sup> |         |
| N4000e Ethernet 10/100BaseTX             | 14T0030  |         |
| Wireless                                 |  |         |
| N4050e 802.11g Print Server <sup>2</sup> | 14T0145  |         |
| <b>Attachment Options</b>                | 50-foot Serial cable                                     | 1038693 |
|  | 6-foot USB cable   | 12A2405 |
|  | 10-foot Parallel cable                                   | 1329605 |
|  | External Serial Adapter                                  | 1368705 |
| <b>Application Solutions</b>             | Japanese Font Card                                       | 1021243 |
|  | Korean Font Card   | 1021240 |
|  | Simplified Chinese Font Card                             | 1021241 |
|  | Traditional Chinese Font Card                            | 1021242 |
| <b>Print Media</b>                       | Transparencies – letter (50 sheets)                      | 70X7240 |

<sup>1</sup> Uses parallel connection

<sup>2</sup> Uses USB connection

Lexmark and Lexmark with diamond design are trademarks of Lexmark International, Inc., registered in the United States and/or other countries. PCL is a registered trademark of Hewlett-Packard Company. The USB-IF logo is a trademark of Universal Serial Bus Implementers Forum, Inc. All other trademarks are the property of their respective owners. © 2005 Lexmark International, Inc. All rights reserved.

71K1190



Printed on recycled paper.

