Lexmark X642e MFP

- Lexmark e-Task 5.7-inch monochrome touch screen provides access to print, copy, fax and scan-to-email functions
- Direct printing of PDF and image files through the front USB Direct Interface
- Scan up to legal-size documents at 600 x 600 dpi black and 300 x 300 dpi color
- Copy or print at up to 45 ppm with a time to first copy as fast as 8.5 seconds






Product Specifications

Weight

Base Warranty

Part Number	22G0550		
Product Class	Workgroup laser MFP		
Print Speed	Up to 45 ppm		
Time to First Page	As fast as 8.5 seconds		
Print Resolution	1200 x 1200 dpi, 2400 image quality printing, 600 x 600 dpi		
Time to first page	As fast as 8.5 seconds		
Processor	514 MHz		
Memory (std./max.)	128MB/640MB		
Connectivity Standard Optional Option Slots	USB, Ethernet, USB Direct Interface Parallel, Serial, Wireless, Gigabit Ethernet, Fiber Optic DRAM DIMM slots: 1; ISP (INA) slots: 1; Firmware Card/Flash memory slots: 2		
Operating Systems	Microsoft Windows, Mac, NetWare, UNIX and Linux		
Printer Languages	PostScript 3, PCL 6 and PPDS Migration Tool		
Direct Print Formats	jpeg, tiff, gif, bmp, png, pcx, dcx, pdf v1.5, html		
Fonts	PostScript: 158 scalable; PCL: 89 scalable including OCR-A, OCR-B and Code 3 of 9 bar codes, 2 bitmapped; PPDS: 39 scalable, 5 bitmapped		
Copy Features	Speed: up to 35 ppm, reduce/enlarge (25-400%), paper saver (2-up and 4-up collation, darkness adjustment, original size to output size selection, copy sele 1-999, job interrupt, date/time stamp, single-pass duplex, message overlay, priority copy, copy countdown		
Fax Features	Speed: 33.6 bps max.; transmission speed: approximately 3 seconds per pag resolution: 200 x 100 dpi, 200 x 200 dpi, 300 x 300 dpi, 400 x 400 dpi; fax redire group fax, manual fax, fax from PC, up to 512-character shortcuts, fax preservati LDAP lookup, Caller ID, speed dials, block junk faxes		
Scan Features	Output resolutions: up to 600 x 600 dpi black, up to 300 x 300 dpi color; scan destinations: Network TWAIN, USB Direct Interface, e-mail, FTP, LDSS, Scan-to-PC; File Formats: TIFF, JPG, PDF; legal-size from flatbed		
Acoustics	56 dBA		
Size (WxDxH)	22 in. x 25.4 in. x 28 in. (560 mm x 645 mm x 710 mm)		
Weight	80 lb. (37.7 kg)		
Paper Capacity Standard Input Maximum Input Standard Output Maximum Output	600 (500 + 100 MPF) 3100 (500 + 500 + 2000 + 100 MPF) 500 500		
Paper Sources Standard Input Maximum Input Standard Output Maximum Output	2 4 1 1		
Media Information Types Size	Plain paper, paper labels, card stock, transparencies, envelopes, vinyl labels, polyester labels, dual web and integrated labels Letter, Legal, A4, A5, JIS B5, Executive, Folio, Statement, Universal (2.75 in. x 5 in. to 8.5 in. x 14 in), envelopes (7³/4, 9, 10, DL, C5, B5)		

In the Box



Lexmark X642e MFP

- X642e MFP
- 10,000-page Return Program Print Cartridge
- Setup Sheets
- Software and
- Documentation CD
 Power Cord
- RJ-11 Phone Cable



Plain Paper: 16 to 47 lb. (60 to 176 g/m²); Card stock: up to 110 lb. index (199 g/m²)


1-year Onsite Repair; See pages 119-127 for additional information

Lexmark X642e MFP

Supplies & Accessories

Supplies	21,000-page High Yield Return Program Print Cartridge ¹	X644H11A	
	21,000-page High Yield Return Program Print Cartridge for Label Applications ¹	X644H01A	
	21,000-page High Yield Print Cartridge ¹	X644H21A	
	10,000-page Return Program Print Cartridge ¹	X644A11A	
	10,000-page Print Cartridge ¹	X644A21A	
	Routine Maintenance Items:		
	Separator Roll Kit	40X0454	
	Pick Up Assembly	40X0453	
	Pressure Pad Cushion	40X0466	
	Charge Roll Kit	40X0127	
	Transfer Roll Kit	40X0130	
	Label Fuser Wiper	40X2665	
	Pick Tires	40X0070	
	Fuser Maintenance Kit	40X0100	
Memory Options	128MB DRAM	13N1523	
	256MB DRAM	13N1524	
	512MB DRAM	13N1526	
	32MB Flash Card	1021208	
	64MB Flash Card	1021209	
Furniture	Low Profile MFP Stand	16C0379	
	MFP Stand with Cabinet	16C0369	
	10-inch Spacer Cabinet	22G0551	
	MFP Stand	16C0389	
	See page 69 for additional information		
Solutions	See pages 77-93 for additional information.		
Security	See pages 78-81 for additional information.		

Paper Handling Options

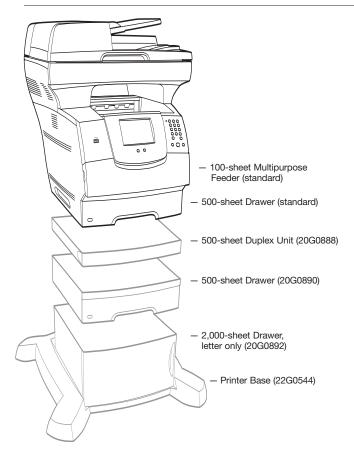

Options not pictured:

250-sheet Drawer (20G0889) 250-sheet Tray (20G0879)

500-sheet Tray (20G0884)

250-sheet Universally Adjustable Drawer (20G1223) 400-sheet Universally Adjustable Drawer (20G1218)

250-sheet Universally Adjustable Tray (20G1224) 400-sheet Universally Adjustable Tray (20G1217)

85-sheet Envelope Feeder (20G0891)

Additional Information

¹ Declared yield in accordance with ISO/IEC 19752.