

40d120 Configuration Sheet #1

SPID and PDN Numbers

40d	
SPID <i>(3-20 digits maximum; exactly 10 digits for Lucent Custom ISDN)</i>	
PDN <i>(10 digits required for proper operation)</i>	

ISDN Version <i>(check one)</i>	<input type="checkbox"/> Lucent National ISDN <input type="checkbox"/> Lucent Custom ISDN <input type="checkbox"/> Nortel National ISDN <input type="checkbox"/> Siemens National ISDN
---	---


120d		SPID
120d #1	Keys 001-060	
	Keys 061-120	
120d #2	Keys 001-060	
	Keys 061-120	
120d #3	Keys 001-060	
	Keys 061-120	
120d #4	Keys 001-060	
	Keys 061-120	

If you have any questions about the Configuration Sheets or Translation Order Guides, please call Tone Commander Customer Technical Support at **(800) 524-0024**.

Tone Commander 40d120 Installation Instructions

40d120 Configuration Sheet #2, Key Mapping

See pages 38-41 for default key assignments.

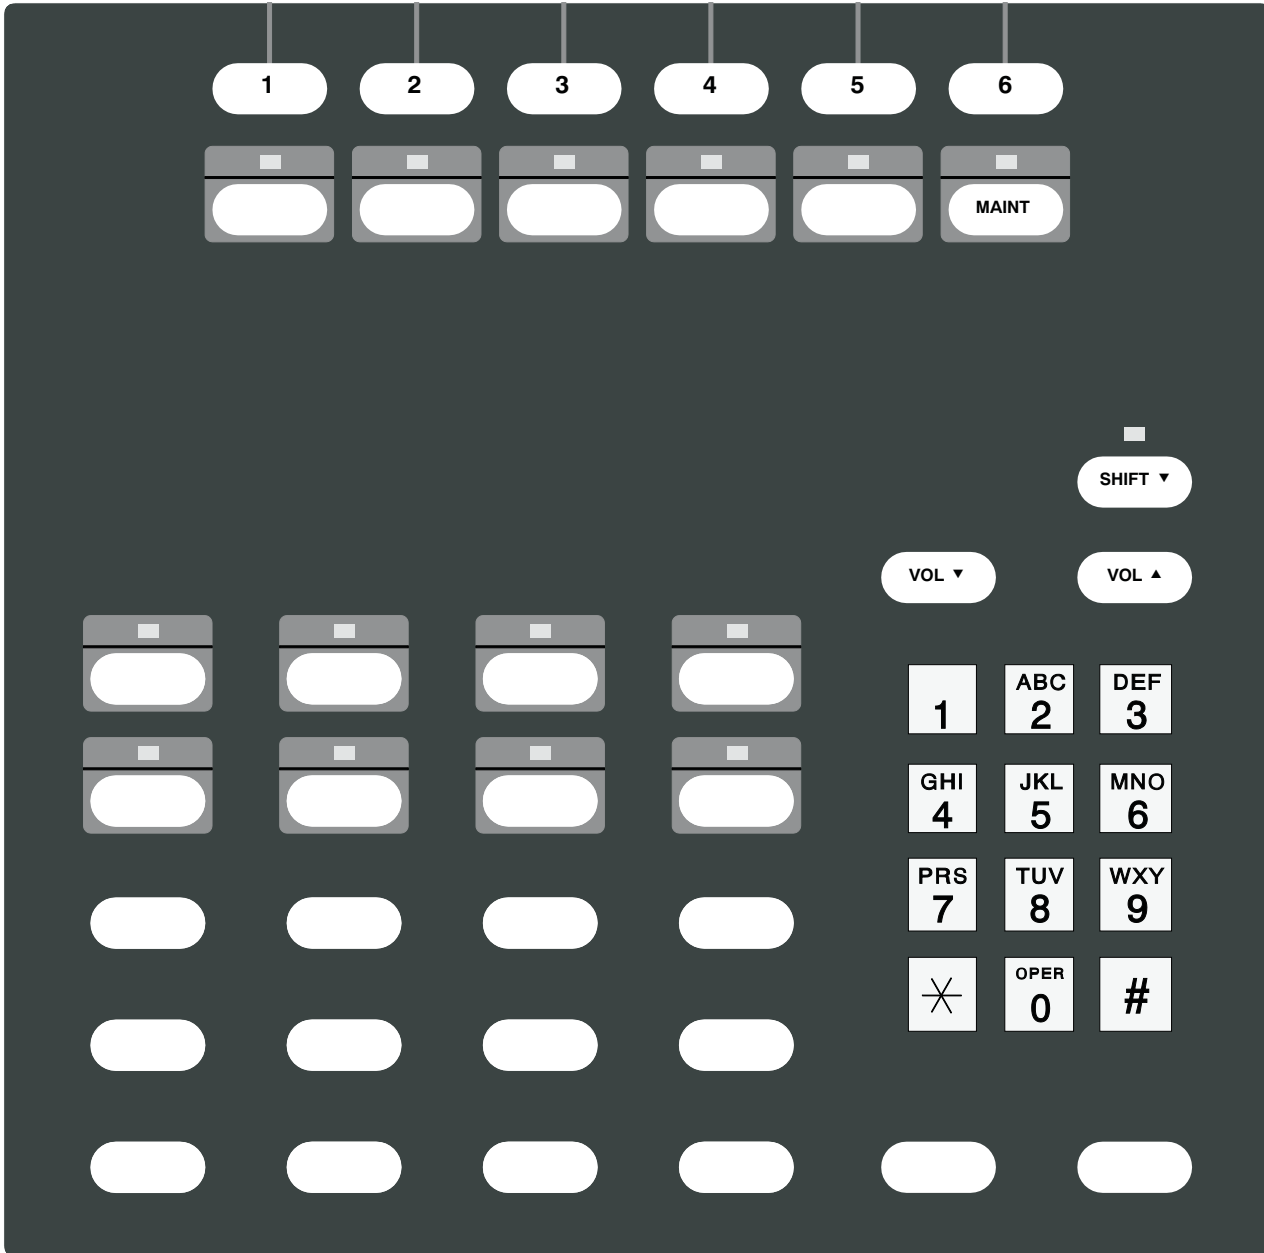

Feature Key	Number To Dial
Call Forward	
Page	
Voice Mail 1	
Voice Mail 2	

40d120 Configuration Sheet #3

Call Queues

40d Internal Identifier		Default Queue Number	Actual Setting (0-8)	Default Timeout Value (seconds)	Actual Setting (000-999 seconds)	Default Timeout Queue Number	Actual Setting (0-8)
InX	External	8		120		8	
InI	Internal	8		120		8	
Icm	Intercom	8		120		8	
CFA	All from	8		120		8	
CFB	Busy from	8		120		8	
CFN	No Ans from	8		150		8	
HLD	Hold Recall	8		120		8	
NXF	NXF Recall	8		120		8	
Pag	Page Recall	8		120		8	
Prk	Park Recall	8		120		8	
XFR	Transfer Recall	8		120		8	
CMP	Camp Recall	8		120		8	
SER	Serial Recall	8		120		8	
FOV	Flash Override	0		120		0	
FLA	Flash	1		120		1	
IMM	Immediate	2		120		2	
PRI	Priority	3		120		3	

40d120 Configuration Sheet #3

Call Queues

Network Identifier		Default Queue Number	Actual Setting (0-8)	Default Timeout Value (seconds)	Actual Setting (000-999 seconds)	Default Timeout Queue Number	Actual Setting (0-8)
InX	External	8		120		8	
InI	Internal	8		120		8	
CFA	All from	8		120		8	
CFB	Busy from	8		120		8	
CFN	No Ans from	8		150		8	
ACB	Call Back	8		120		8	
Icm	Intercom	8		120		8	
OnL	Online from	8		120		8	
Pri	Priority	8		120		8	
HLD	Hold Recall	8		120		8	
CBK	CBak Recall	8		120		8	
NXF	NXF Recall	8		120		8	
Pag	Page Recall	8		120		8	
Prk	Park Recall	8		120		8	
RCL	Recall from	8		120		8	
WT?*	WATS ?*	8		120		8	
LN?*	Line ?*	8		120		8	

* ? matches any character sent by the network. If WT1 is sent then WATS 1 is displayed.

40d120 Configuration Sheet #4

Recall Timers

Timer	Default Value (seconds)	Actual Value (000-999 seconds)
Ring Delay	0	
Hold Recall	120	
Page Recall	120	
Call Back Recall	120	
NXF Recall	120	

Loop Setup

CA	Default Value • Non-reserved = N • Terminate Only = T • Originate Only = O • Priority Only = P • Intercom = I (Nat. only) • UNUSED = blank	Actual Value (N, T, O, P, I, blank)
1	N	
2	N	
3	N	
4	N	
5	N	
6	N	
7	N	
8	N	
9		
10		
11		

CA	Default Value • Non-reserved = N • Terminate Only = T • Originate Only = O • Priority Only = P • Intercom = I (Nat. only) • UNUSED = blank	Actual Value (N, T, O, P, I, blank)
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		

Tone Commander 40d120 Installation Instructions

120d _____ Configuration Sheet #5, DSS Keys 1-30

DSS keys are numbered vertically on the console – see page 42.

DSS Key #	User Name (18 max.)	Directory Number (10 max.)	DSS or Autodial Number (18 max.)	VM (7 max.)	CA	S P I D
1						
2						
3						
4						
5						
6						
7						
8						
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						
21						
22						
23						
24						
25						
26						
27						
28						
29						
30						

120d _____ Configuration Sheet #6, DSS Keys 31-60

DSS keys are numbered vertically on the console – see page 42.

DSS Key #	User Name (18 max.)	Directory Number (10 max.)	DSS or Autodial Number (18 max.)	VM (7 max.)	CA	S P I D
31						
32						
33						
34						
35						
36						
37						
38						
39						
40						
41						
42						
43						
44						
45						
46						
47						
48						
49						
50						
51						
52						
53						
54						
55						
56						
57						
58						
59						
60						

Tone Commander 40d120 Installation Instructions

120d _____ Configuration Sheet #7, DSS Keys 61-90

DSS keys are numbered vertically on the console – see page 42.

DSS Key #	User Name (18 max.)	Directory Number (10 max.)	DSS or Autodial Number (18 max.)	VM (7 max.)	CA	S P I D
61						
62						
63						
64						
65						
66						
67						
68						
69						
70						
71						
72						
73						
74						
75						
76						
77						
78						
79						
80						
81						
82						
83						
84						
85						
86						
87						
88						
89						
90						

120d _____ Configuration Sheet #8, DSS Keys 91-120

DSS keys are numbered vertically on the console – see page 42.

DSS Key #	User Name (18 max.)	Directory Number (10 max.)	DSS or Autodial Number (18 max.)	VM (7 max.)	CA	S P I D
91						
92						
93						
94						
95						
96						
97						
98						
99						
100						
101						
102						
103						
104						
105						
106						
107						
108						
109						
110						
111						
112						
113						
114						
115						
116						
117						
118						
119						
120						