




# Important Information About Your Studio Display Cable

## Connecting Your Display to Your Computer

The connector on your display cable is a VGA video connector (shown below). All references to the monitor connector (2-row DB-15 video connector) in the user's manual are replaced by the information presented here. For instructions on connecting your display, see the user's manual that came with your display.




## Connecting Your Display Using the VGA-to-Mac Adapter


To connect your display to a computer or graphics card with a Macintosh-type connector (2-row DB-15 connector), or to a graphics card with both VGA and Macintosh connectors, you need to use the VGA-to-Mac adapter that came with your monitor. See the following illustration.

- 1 Connect the Macintosh(2-row DB-15) end of the adapter to your computer or graphics card and tighten the thumbscrews.

- 2 Connect the monitor connector to the VGA end of the adapter and tighten the thumbscrews.

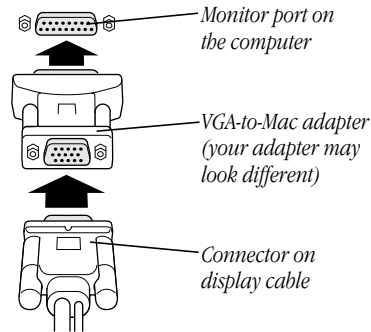

## Display Cable Connector Specifications



High density D-Sub 15  
VGA video connector

Pin	Output signal	Pin	Output signal
1	Red video	9	Not used
2	Green video	10	Ground
3	Blue video	11	Vertical sync
4	ID bit 1	12	DDC SDA / ID bit 3
5	DDC ground	13	Horizontal sync
6	Red video ground	14	Vertical sync
7	Green video ground	15	DDC SCL / ID bit 2
8	Blue video ground	Shell	Shell chassis ground shield ground